



Verpackt im Gurt nach DIN IEC 60286-3
 Tape on Reel Packaging according to DIN IEC 60286-3
 Verpackungseinheit: 170 Stück
 Packaging unit: 170 pcs



Abspulrichtung - Reel off Direction

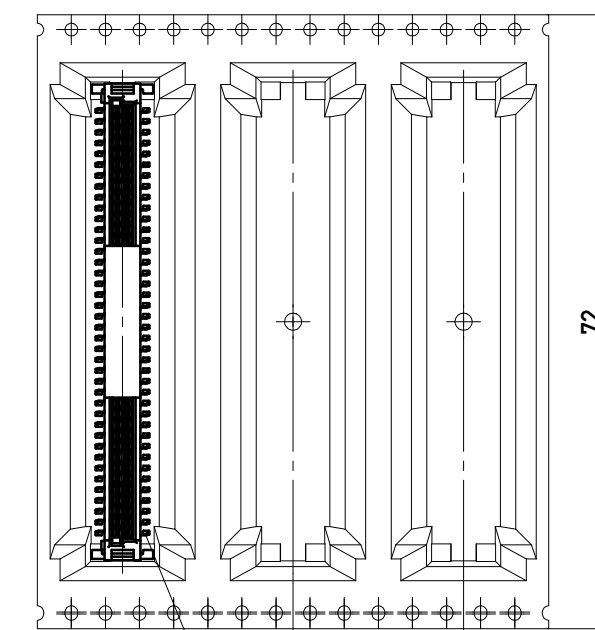


Anforderungsstufe 1
 Performance Level 1

Kontaktbereich vergoldet
 Mating Area gold plating


Anschlussbereich verzinkt 4-6 μ m
 Terminal Area 4-6 μ m tin plating

Koplanarität der Anschlüsse $\leq 0,1$ mm
 Coplanarity Area of Termination $\leq 0,1$ mm

Leiterplatten-Layout Vorschlag für SMT
 PCB-Layout Proposal for SMT

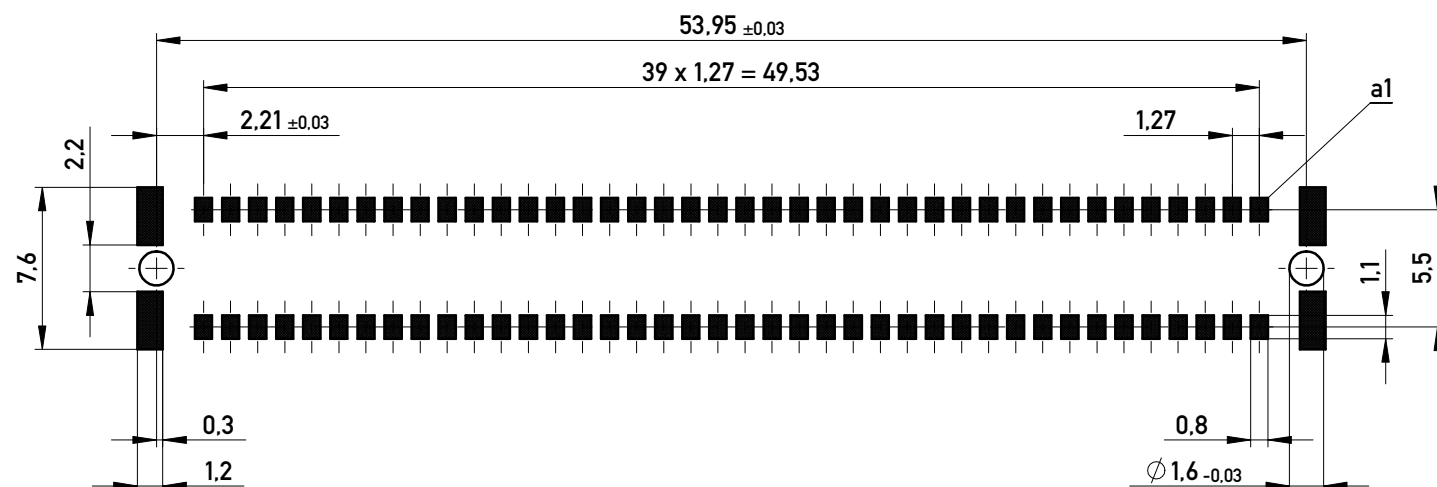

BA 7-23 - hohe Bauhöhe
 type 7-23 - high profile

Information: All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances  All Dimensions in mm	Scale 3:1	Designation Federl. SMC-B 80-SMD-BA7-23 Female SMC-B 80-SMT-type7-23	
	Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com	
b Index	18.11.2013 Date	234201		I A3
		Class SMCB		

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.