


DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)
iBridge Connector 8 Cont. with 250 mm stranded discrete wire AWG22
Max. component temperature 125°C

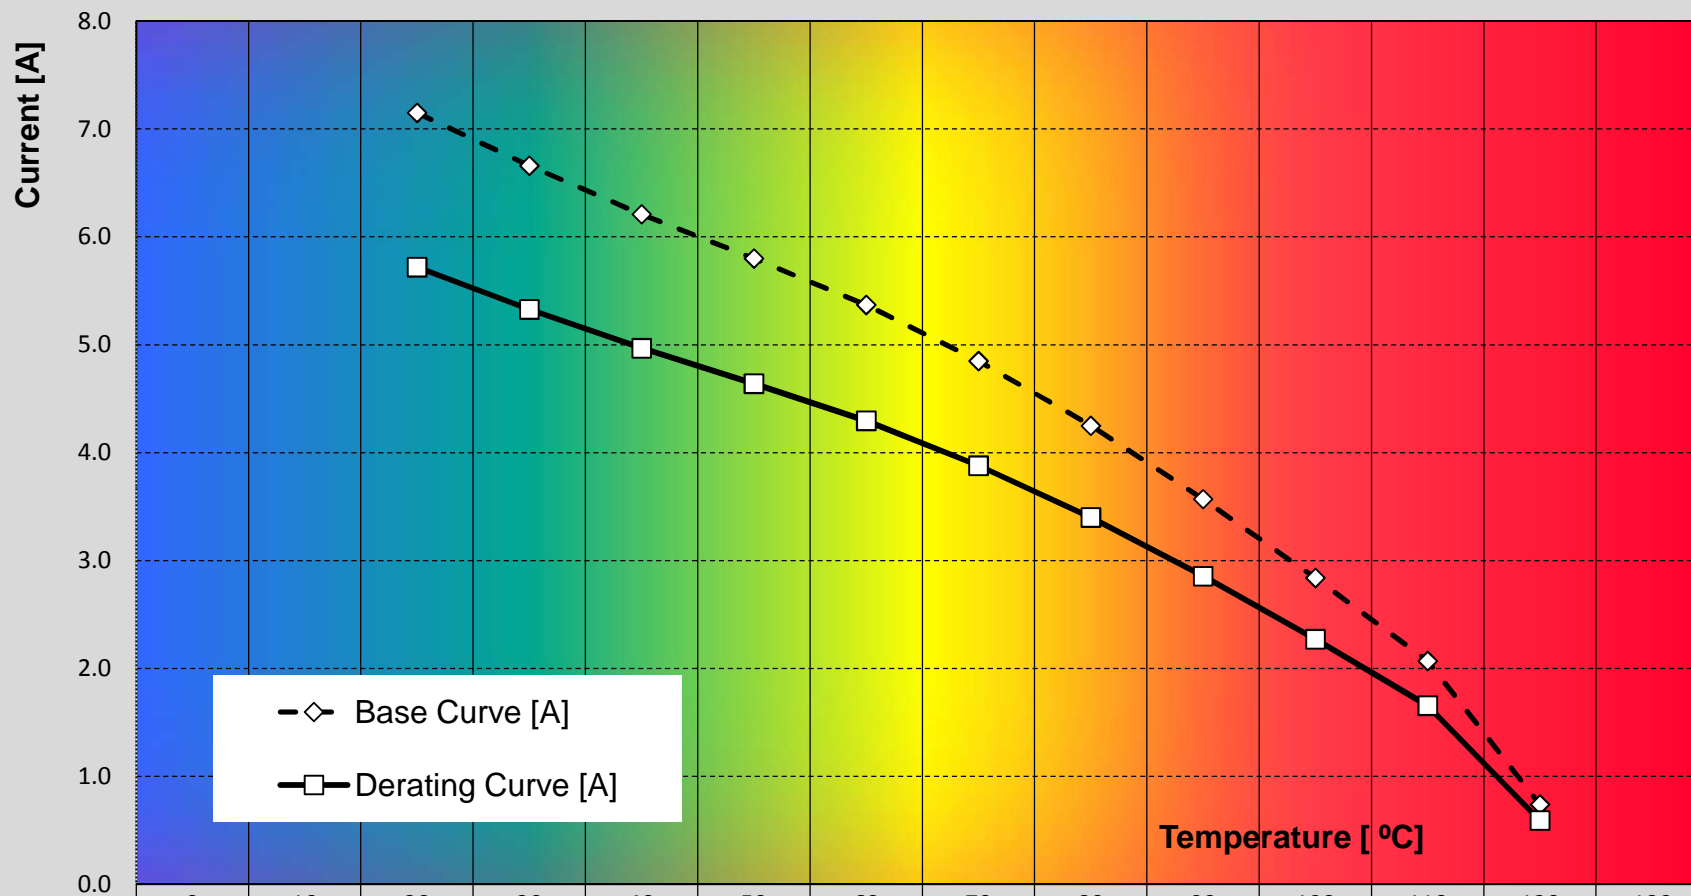

	0	10	20	30	40	50	60	70	80	90	100	110	120	130
Base Curve [A]			7.15	6.66	6.21	5.80	5.37	4.85	4.25	3.57	2.84	2.07	0.74	
Derating Curve [A]			5.72	5.33	4.97	4.64	4.30	3.88	3.40	2.86	2.27	1.66	0.59	