


DERATING CURVE (Current carrying capacity acc. IEC 60512-5-2 Test 5b)

Maxibridge connector, 3 contacts, with 200 mm insulated stranded discrete wire AWG18
2-layers PCB, max component temperature 150°C

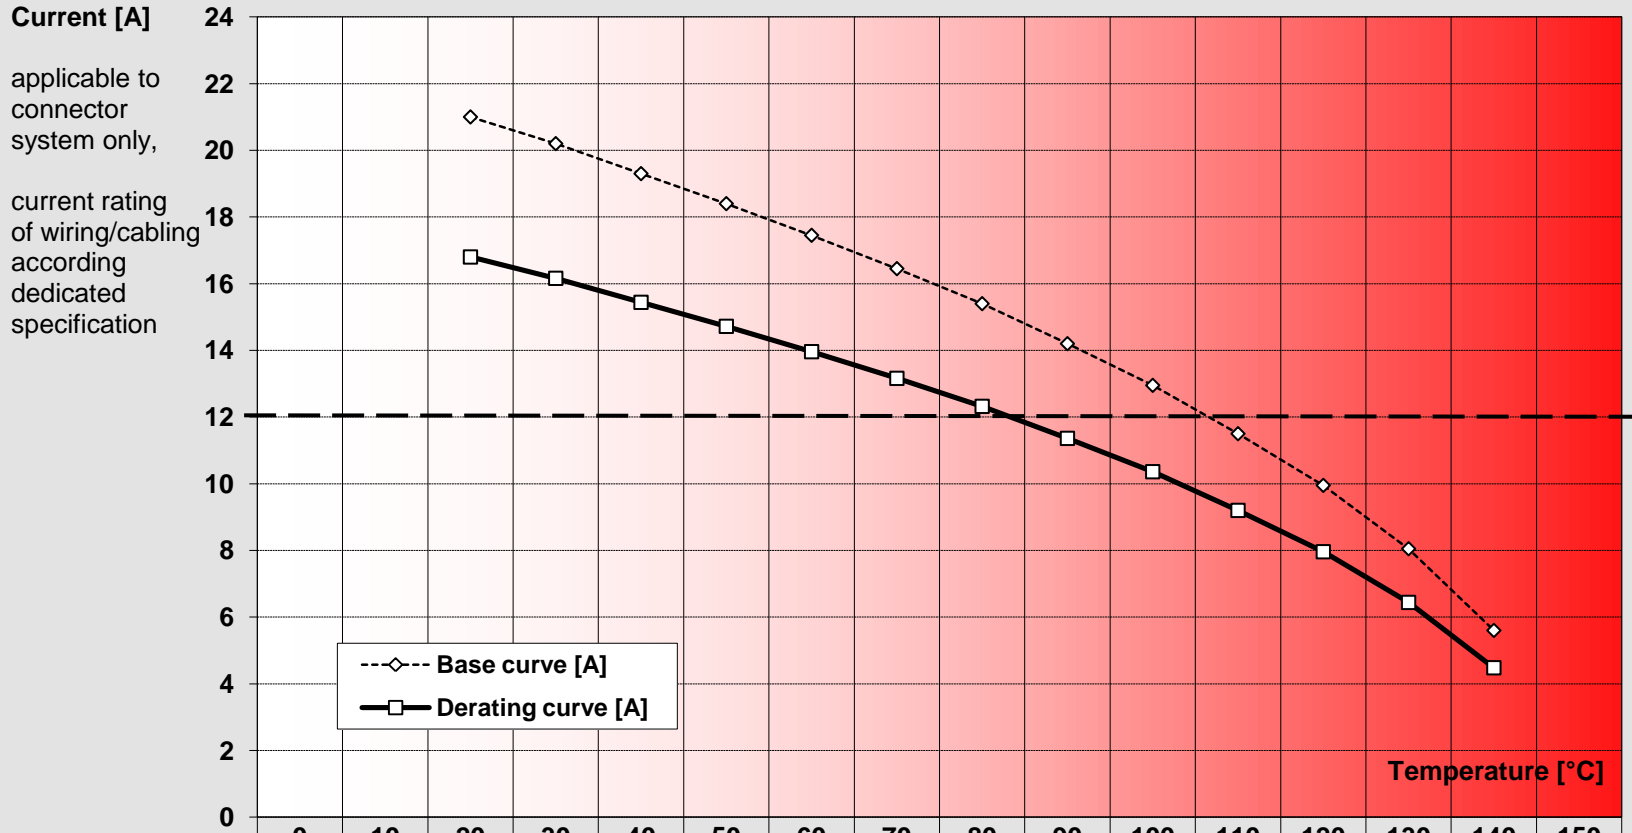

Base curve [A]			21	20,2	19,3	18,4	17,45	16,45	15,4	14,2	12,95	11,5	9,95	8,05	5,6	
Derating curve [A]			16,80	16,16	15,44	14,72	13,96	13,16	12,32	11,36	10,36	9,20	7,96	6,44	4,48	